



MASONITE BEAMS



Please contact us for our FSC® certified products

B14



NOTCHED PERIMETER BRACING

1


End cap / Gripper / SES Detail

2

Min. 22x75mm perimeter bracing located in factory-cut notched flanges. Fix using 1 no. 2.8x65mm nail to each joist

3

Where required butt joint bracing by skew nailing or fixing with screws

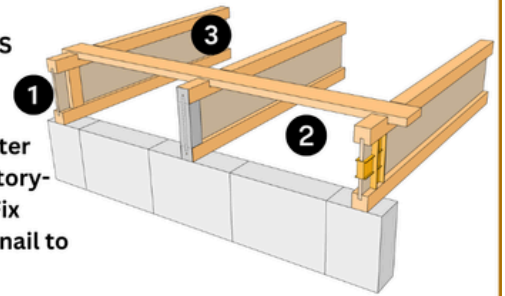


Notched Perimeter Bracing

Perimeter bracing to run in notch

Bracing to be min. 22x75mm

Bracing can be butt joined over middle of joist and fixed by skew nailing or screwing

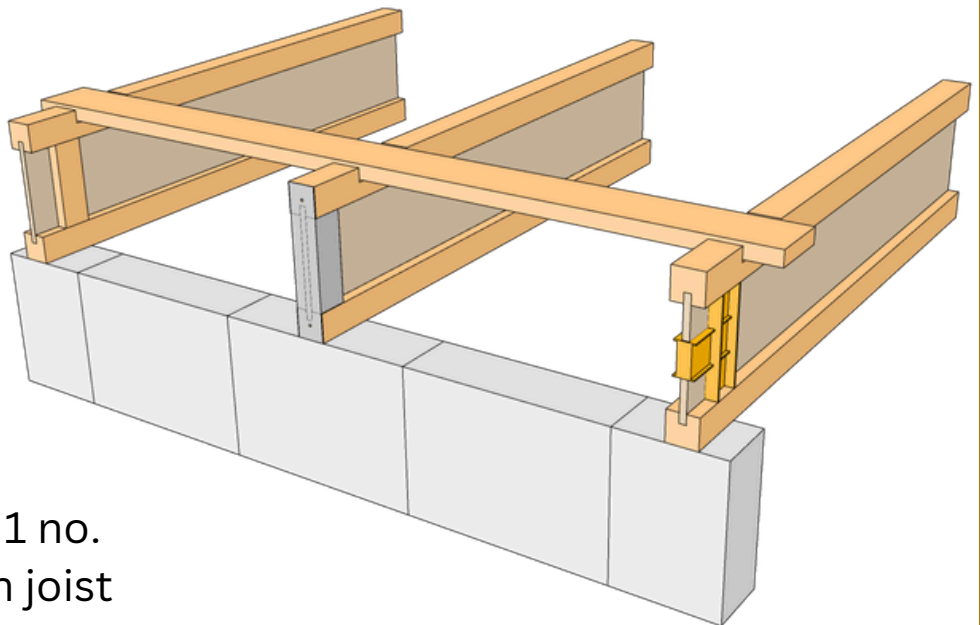

Wall supporting joists

Fix bracing using min 1 no. 2.8x65mm nail to each joist

***Perimeter notch factory cut only - do not cut on site!**

Benefits

- Speed of installation – can save up to 2 hours depending on the size of floor
- Elimination of 2 products: perimeter noggings and z-clips
- Use of safety bracing reducing cost and double handling
- Less waste in skip, less product to send to site